




# PAR G-Portal Quick Reference Guide

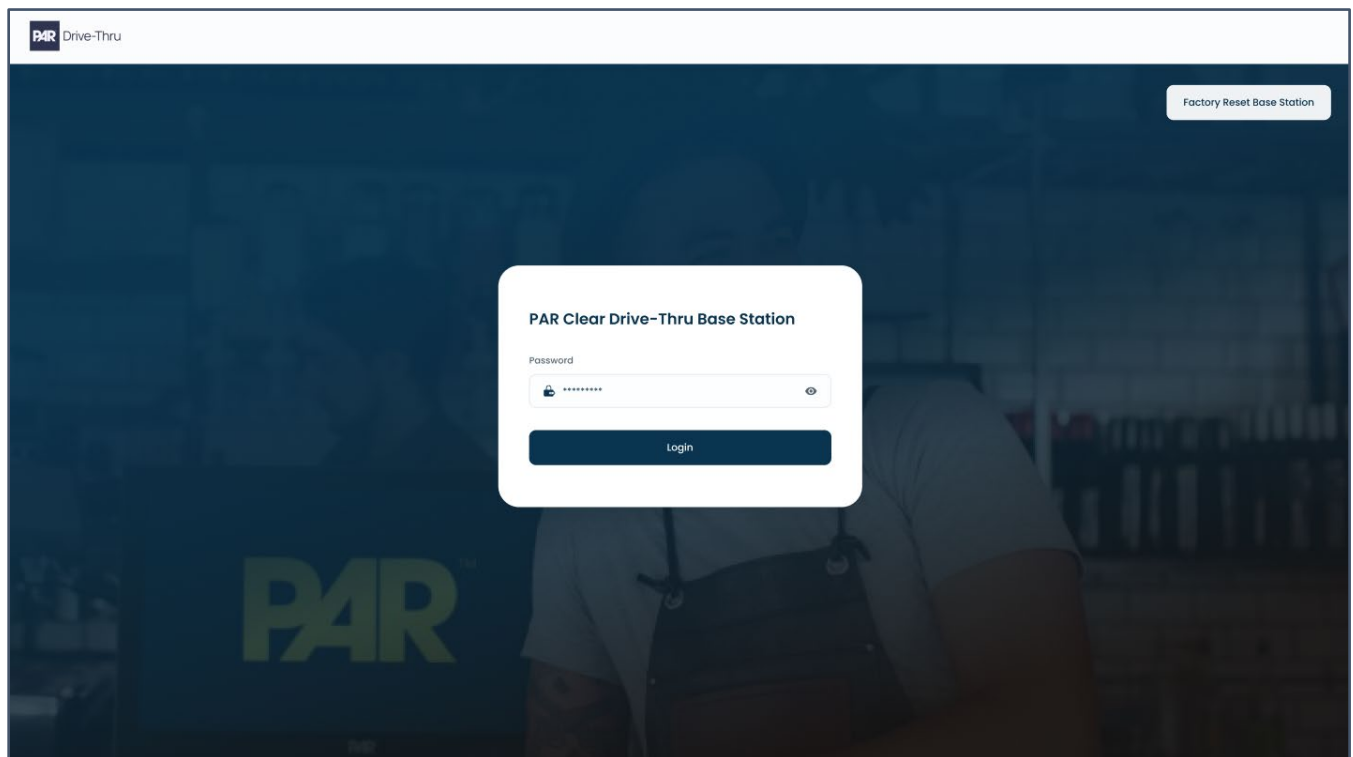

# Contents

Prerequisites.....	3
Creating a Corporate/Franchise on DT Cloud Portal .....	4
Creating a Site on DT Cloud Portal .....	5
Creating a Site Admin on DT Cloud Portal .....	6
Logging into the Basestation .....	7
Version History .....	11

## Prerequisites

- A device with an Ethernet port such as a laptop, tablet, or desktop for accessing the internet.
- An internet connection that can connect to the PAR Drive-Thru Cloud Portal at <https://portal.drivethru.partech.com>
- An account on the PAR Drive-Thru Cloud Portal

# Creating a Corporate/Franchise on DT Cloud Portal

1. Log into the PAR Drive-Thru Cloud Portal on the Basestation with provided address or link and enter in your credentials with Laptop or computer that is accessible to the internet:  
<https://portal.drivethru.partech.com>
2. *You can skip this step if a Corporation is already present for your account and/or for the Basestation that you are setting up.*  
Navigate to the 'Corporations' section, select 'Corporations' and click '+ Add New Corporate'.
3. Populate the necessary fields and click 'Add Corporate':
4. *You can skip this step if a Franchise is already present for your account and/or for the Basestation that you are setting up.*  
Navigate to the 'Franchise' section and click '+ Add New Franchise'.
5. Populate the necessary fields and click 'Add Franchise':

## Creating a Site on DT Cloud Portal


1. Navigate to the '**Sites**' section and click on '+ Add New Site'.
2. Populate the necessary fields and click '**Add Site**':
3. After a Site has been added, a pop-up screen appears with a **6-digit Activation code**. [Copy the code](#) by clicking the copy button or writing it down. The code expires in 24 hours and is a one-time use code. Close the pop-up once the code is copied or written down.

## Creating a Site Admin on DT Cloud Portal

1. Navigate to **'Users' > 'Site Admins'**.
2. Click the **'+Add New Site Admin'** button and populate the **Name** and **Email** fields.
3. Select the appropriate site from the **'Select a Site'** dropdown menu and click **'Add User'**.

# Logging into the Basestation

1. Open the basestation and plug in one end of an ethernet cable to basestation LAN2. Next, plug in the power adapter to the basestation and proceed to power up the unit.

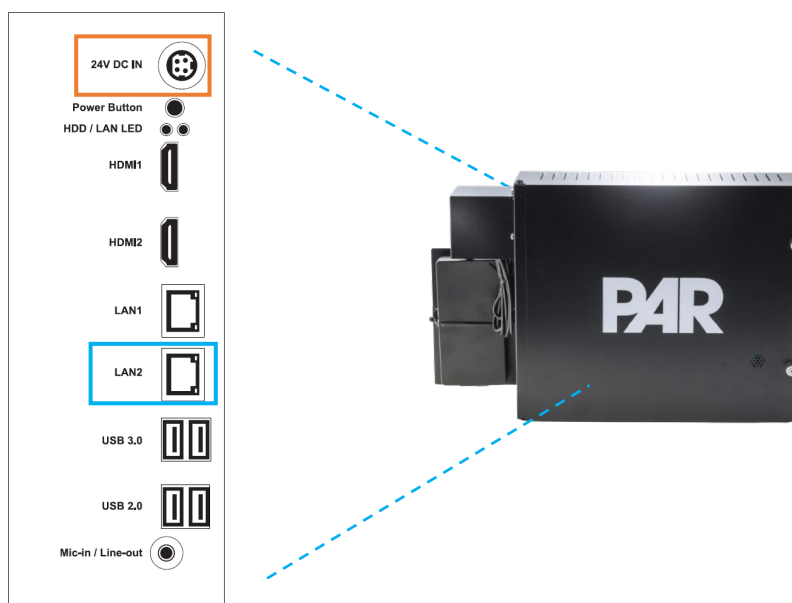

2. Wait about 1-2 minutes until the basestation boots up, then connect the other end of the Ethernet cable to the Laptop/Computer.
3. Configure the Laptop/Computer network Ethernet port to static and match the basestation's default network settings range below (example on a Windows machine):
  - a. **IP** = 192.168.99.44 (example only - basestation default IP is 192.168.99.77)
  - b. **Subnet Mask** = 255.255.255.0
  - c. **Default Gateway** = 192.168.99.1
  - d. **DNS** = 8.8.8.8, 1.1.1.1
4. Open a browser window on the computer and type <http://m7800-0810:7800/> into the address bar and hit **Enter**.
5. Enter the default password which is '**12345**'. Once logged in you will be prompted to change the password. Click '**Set Password**' to change the password
  - a. Password minimum requirements: 8 characters, 1 symbol, 1 capital letter, and 1 number.
6. The '**Network Setup**' screen should then appear. Select **DHCP** or **Static** under the '**Control Unit Network**' section. If using "Static", populate the remaining fields with values supplied by the store's IT team. Click the '**Save & Next**' button.
7. Disconnect the laptop/computer ethernet cable from LAN2 of the basestation.
8. Next, configure your laptop/computer network ethernet port to how it was originally, and connect your laptop/computer to the store's open network.

9. Open a browser window on the computer and type in <http://m7800-0810:7800>, and click 'Enter'.
10. Type in the password set up in step 5 and click 'Login'.
11. Verify the network information from step 6 is correct and click on 'Save & Next'.
12. The 'Cloud Setup' screen should appear. Click on 'Save & Next' to proceed. These fields are pre-populated but are editable and should not be edited unless under the advice of a PAR employee.
13. The 'Certificate Claim' screen appears. Select 'Activating Hardware in a New Site'. A field appears in which to enter the activation code. Paste or enter the activation code copied earlier in Step 3 of "[Creating a Site on DT Cloud Portal](#)". Click on 'Claim Certificate'. The screen should load and a "Connected Successfully" message appears. If an error message is returned, redo Step 3 of "[Creating a Site on DT Cloud Portal](#)" to generate a new code and re-enter the code. If still unsuccessful, please contact PAR Drive Thru Support.
14. Open the Drive Thru Cloud and login with credentials.
15. Navigate to 'Devices' and look for the 'Site Name' added in the [Creating a Site on DT Cloud Portal](#) section.
16. Select the 'Actions' column for the device and navigate to 'Settings' to ensure the device is accessible.



### FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation. Please note that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### ISED non-interference disclaimer

This device contains license-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's license-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

This device complies with the Canadian ICES-003 Class A specifications. CAN ICES-003(B) / NMB-003 (A).

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempt de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) L'appareil ne doit pas produire de brouillage;
- (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Cet appareil numérique de la Canadian ICES-003. Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada.

### RF Exposure information (SAR)

This equipment has been tested and meets applicable limits for radio frequency (RF) exposure. Specific Absorption Rate (SAR) refers to the rate at which the body absorbs RF energy. The SAR limit is 1.6 watts per kilogram in countries that set the limit averaged over 1 gram of tissue. During testing, device radios are set to their highest transmission levels and placed in positions that simulate use near the head, with 25.35mm separation.

Enclosures with metal parts may change the RF performance of the device, including its compliance with RF exposure guidelines, in a manner that has not been tested or certified.

Cet équipement a été testé et respecte les limites applicables d'exposition aux radiofréquences (RF). Le débit d'absorption spécifique est la vitesse à laquelle le corps absorbe l'énergie radiofréquences. La limite du débit d'absorption spécifique est 1.6 watt par kilogramme dans les pays où la moyenne a été établie sur un gramme de tissu. Pendant l'essai, les radios de l'appareil sont réglées sur le niveau de transmission maximal et sont placées dans des positions simulant une utilisation à proximité du Tête, avec une séparation de 25.35mm. Les étuis dotés de pièces métalliques peuvent modifier les performances des radiofréquences de l'appareil, y compris sa conformité aux directives d'exposition aux radiofréquences, d'une façon qui n'a pas été testée ou certifiée.

**Disclaimer:** This material has been created in order to accommodate a wide range of restaurant operations and your specific business practices and system configuration may differ slightly from what is represented in this material. While ParTech, Inc. ("PAR") takes great care to ensure the accuracy of these materials, all material is provided "as is" without warranty of any kind, either express or implied, including, but not limited to, warranties of merchantability or fitness for a particular purpose. PAR does not make any warranties or representations that the materials will meet your requirements or that the operations of the hardware will be uninterrupted or error free.

**Trademark Notices:** The PAR logo is a trademark of PAR Technology Corporation, the parent company of ParTech, Inc. or its affiliates. All other product names used throughout this material are trademarks of the respective companies. No such use of any trademark is intended to convey endorsement or other affiliation with these companies.

**Reproduction:** Copyright © 2024 ParTech, Inc. All rights reserved. This publication, or any part thereof, may not be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, storage in an information retrieval system, or otherwise, without the prior written permission of ParTech, Inc., PAR Technology Park, 8383 Seneca Turnpike, New Hartford, NY 13413-4991 USA.

## Version History

Date	Version	Notes
9/19/24	-1	Initial Draft
11/25/24	A	General formatting/layout updates
12/20/24	B	Updated screenshots, added DHCP information
1/31/25	C	Added <a href="#">DHCP Setup</a> and <a href="#">Static Setup</a> sections under “Option A”
03/05/25	D	General formatting/layout updates
9/11/25	E	Updated <a href="#">Logging into the Basestation</a> section/procedure